



TCW060

TCW060 1xTL-D18W HF

1 pc - MASTER TL-D - 18 W - Electronic high-frequency


Designed for use in demanding environments, TCW060 is an economical, compact waterproof luminaire. Dedicated versions are available for TL-D and TL5 lamps. Ingress-protected to a level of IP65 and operating solely on electronic gear, this is a competitive energy-saving solution for wet spaces – at the same cost as an electromagnetic solution. A flexible ceiling clip facilitates easy installation and maintenance.

Product data

General Information	
Number of light sources	1 pc
Lamp family code	TL-D [MASTER TL-D]
Lamp power	18 W
Kombipack	-
Gear	HF [Electronic high-frequency]
Optical cover/lens type	Polycarbonate bowl/cover prismatic
Emergency lighting	-
Connection	Screw connection block 3-pole
Glow-wire test	Temperature 650 °C, duration 5 s
Country version	NO [Norway]
CE mark	CE mark
Operating and Electrical	
Input Voltage	220 to 240 V
Mechanical and Housing	
Fixation point length distance (Nom)	350 mm

Overall length	660 mm
Approval and Application	
Ingress protection code	IP65 [Dust penetration-protected, jet-proof]
Mech. impact protection code	IK08 [5 J vandal-protected]
Application Conditions	
Suitable for random switching	No
Product Data	
Full product code	871155981377699
Order product name	TCW060 1xTL-D18W HF
EAN/UPC - Product	8711559813776
Order code	910503610618
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	12
Material Nr. (12NC)	910503610618
Net Weight (Piece)	1.120 kg

Dimensional drawing

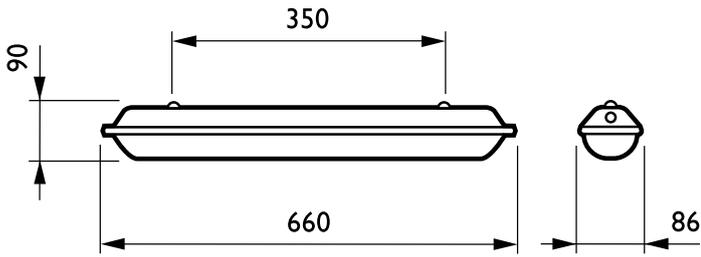

TCW060



Photometric data

TCW060 1xTL-D18W HF

TCW060 1xTL-D18W HF

1 x 1350 lm

1 x 1350 lm

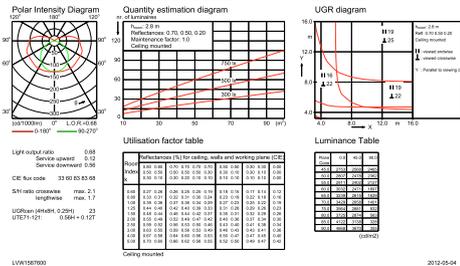

LWV1587600

2012-05-04

IFGU1_TCW060 1xTL-D18W HF.EPS

IFPC1_TCW060 1xTL-D18W HF.EPS

