



# TCW060

## TCW060 2xTL-D58W HF

2 pcs - MASTER TL-D - 58 W - Electronic high-frequency

Designed for use in demanding environments, TCW060 is an economical, compact waterproof luminaire. Dedicated versions are available for TL-D and TL5 lamps. Ingress-protected to a level of IP65 and operating solely on electronic gear, this is a competitive energy-saving solution for wet spaces – at the same cost as an electromagnetic solution. A flexible ceiling clip facilitates easy installation and maintenance.


### Product data

General Information	
Number of light sources	2 pcs
Lamp family code	TL-D [ MASTER TL-D]
Lamp power	58 W
Kombipack	-
Gear	HF [ Electronic high-frequency]
Optical cover/lens type	Polycarbonate bowl/cover prismatic
Emergency lighting	-
Connection	Screw connection block 3-pole
Glow-wire test	Temperature 650 °C, duration 5 s
Country version	NO [ Norway]
CE mark	CE mark
Operating and Electrical	
Input Voltage	220 to 240 V
Mechanical and Housing	
Fixation point length distance (Nom)	1200 mm

Overall length	1570 mm
Approval and Application	
Ingress protection code	IP65 [ Dust penetration-protected, jet-proof]
Mech. impact protection code	IK08 [ 5 J vandal-protected]
Application Conditions	
Suitable for random switching	No
Product Data	
Full product code	871155981382099
Order product name	TCW060 2xTL-D58W HF
EAN/UPC - Product	8711559813820
Order code	910503611118
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	6
Material Nr. (12NC)	910503611118
Net Weight (Piece)	2.850 kg

# TCW060

## Dimensional drawing

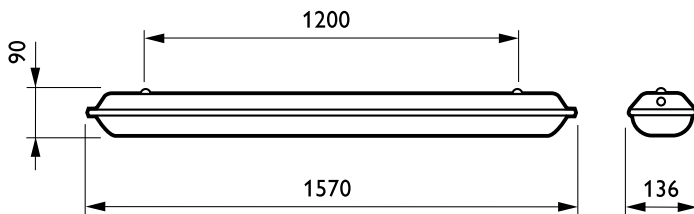


## TCW060

## Photometric data


TCW060 2xTL-D58W HF

2 x 5240 lm

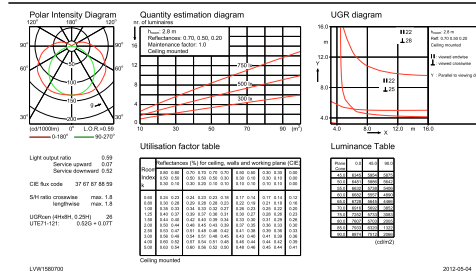

TCW060 2xTL-D58W HF

2 x 5240 lm



IFGU1\_TCW060 2xTL-D58W HF.EPS

IFPC1\_TCW060 2xTL-D58W HF.EPS

