

















	Rated operational current	Max. motor rating for three-phase motors 50 - 60 Hz						Conventional thermal current I I _{th} = I _e AC-1 at 60 °C	Contact configuration	Circuit symbol	
	AC-3	AC-3			AC-4			Open	N/O = normally open contact NC = normally closed contact		
	380 V 400 V	220 V 230 V	380 V 400 V	660 V 690 V	220 V 230 V	380 V 400 V	660 V 690 V				
	I _e A	P kW	P kW	P kW	P kW	P kW	P kW				I _{th} = I _e A
Basic device											
Screw terminals											
3 pole											
	7	2.2	3	3.5	1	2.2	2.9	20	1 N/O	–	
	7	2.2	3	3.5	1	2.2	2.9	20	–	1 NC	
	9	2.5	4	4.5	1.5	2.5	3.6	20	1 N/O	–	
	9	2.5	4	4.5	1.5	2.5	3.6	20	–	1 NC	
	12	3.5	5.5	6.5	2	3	4.4	20	1 N/O	–	
	12	3.5	5.5	6.5	2	3	4.4	20	–	1 NC	
	15.5	4	7.5	7	2	3	4.4	20	1 N/O	–	
	15.5	4	7.5	7	2	3	4.4	20	–	1 NC	
	18	5	7.5	11	2.5	4.5	6.5	35	1 N/O	–	
	18	5	7.5	11	2.5	4.5	6.5	35	–	1 NC	
	25	7.5	11	14	3.5	6	8.5	40	1 N/O	–	
	25	7.5	11	14	3.5	6	8.5	40	–	1 NC	
	32	10	15	17	4	7	10	40	1 N/O	–	
	32	10	15	17	4	7	10	40	–	1 NC	
	38	11	18.5	21	4	7	10	40	1 N/O	–	
	38	11	18.5	21	4	7	10	40	–	1 NC	

Information relevant for export to North America
UL File No. E29096
UL CCN NLDX
CSA File No. 012528
CSA Class No. 2411-03, 3211-04
NA Certification UL Listed, CSA certified
See also → Page 5/84

	AC operation Part no. Article no.	Price See price list	DC operation Part no. Article no.	Price See price list	Std. pack	Notes
Can be combined with auxiliary contact						
DILM32-XHI.. DILA-XHI(V)..	DILM7-10(230V50HZ) 276550		DILM7-10(24VDC) 276565		1 off	Contacts to EN 50 012. For all DC operated contactors DILM7 - DILM15 the following applies: • Integrated varistor-suppressor circuit. For DC operated contactors DILM17 - DILM170 the following applies: • Integrated suppressor circuit in actuating electronics For AC operated contactors DILM115 - DILM170 the following applies: • Integrated suppressor circuit in actuating electronics For DILM7-01 – DILM38-01 the following applies: • With mirror contact.
DILA-XHI(V)..	DILM7-01(230V50HZ) 276585		DILM7-01(24VDC) 276600		 	1 ¹⁾ Electrical lifespan → 5/91
DILM32-XHI.. DILA-XHI(V)..	DILM9-10(230V50HZ) 276690		DILM9-10(24VDC) 276705			
DILA-XHI(V)..	DILM9-01(230V50HZ) 276725		DILM9-01(24VDC) 276740			
DILM32-XHI.. DILA-XHI(V)..	DILM12-10(230V50HZ) 276830		DILM12-10(24VDC) 276845			
DILA-XHI(V)..	DILM12-01(230V50HZ) 276865		DILM12-01(24VDC) 276880			
DILM32-XHI.. DILA-XHI(V)..	DILM15-10(230V50HZ) ¹⁾ 290058		DILM15-10(24VDC) ¹⁾ 290073			
DILA-XHI(V)..	DILM15-01(230V50HZ) ¹⁾ 290093		DILM15-01(24VDC) ¹⁾ 290108			
DILM32-XHI.. DILA-XHI(V).. DILM32-XHI11-S	DILM17-10(230V50HZ) 277004		DILM17-10(RDC24) 277018			
DILA-XHI(V).. DILM32-XHI11-S	DILM17-01(230V50HZ) 277036		DILM17-01(RDC24) 277050			
DILM32-XHI.. DILA-XHI(V).. DILM32-XHI11-S	DILM25-10(230V50HZ) 277132		DILM25-10(RDC24) 277146			
DILA-XHI(V).. DILM32-XHI11-S	DILM25-01(230V50HZ) 277164		DILM25-01(RDC24) 277178			
DILM32-XHI.. DILA-XHI(V).. DILM32-XHI11-S	DILM32-10(230V50HZ) 277260		DILM32-10(RDC24) 277274			
DILA-XHI(V).. DILM32-XHI11-S	DILM32-01(230V50HZ) 277292		DILM32-01(RDC24) 277306			
DILM32-XHI.. DILA-XHI(V).. DILM32-XHI11-S	DILM38-10(230V50HZ) ¹⁾ 112428		DILM38-10(RDC24) ¹⁾ 112442			
DILA-XHI(V).. DILM32-XHI11-S	DILM38-01(230V50HZ) ¹⁾ 112456		DILM38-01(RDC24) ¹⁾ 112470			

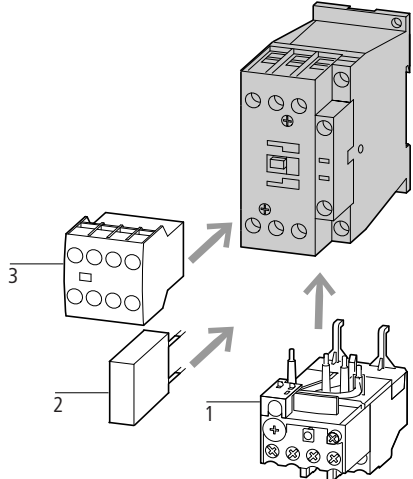

Accessories
1 Overload relay
2 Suppressor
3 Auxiliary contact module
Further actuating voltages
Accessories
Page
→ Chapter 6
→ 5/54
→ 5/38
→ 5/73
→ 5/56